


C-FRAME WELDERS - MODEL 0FG

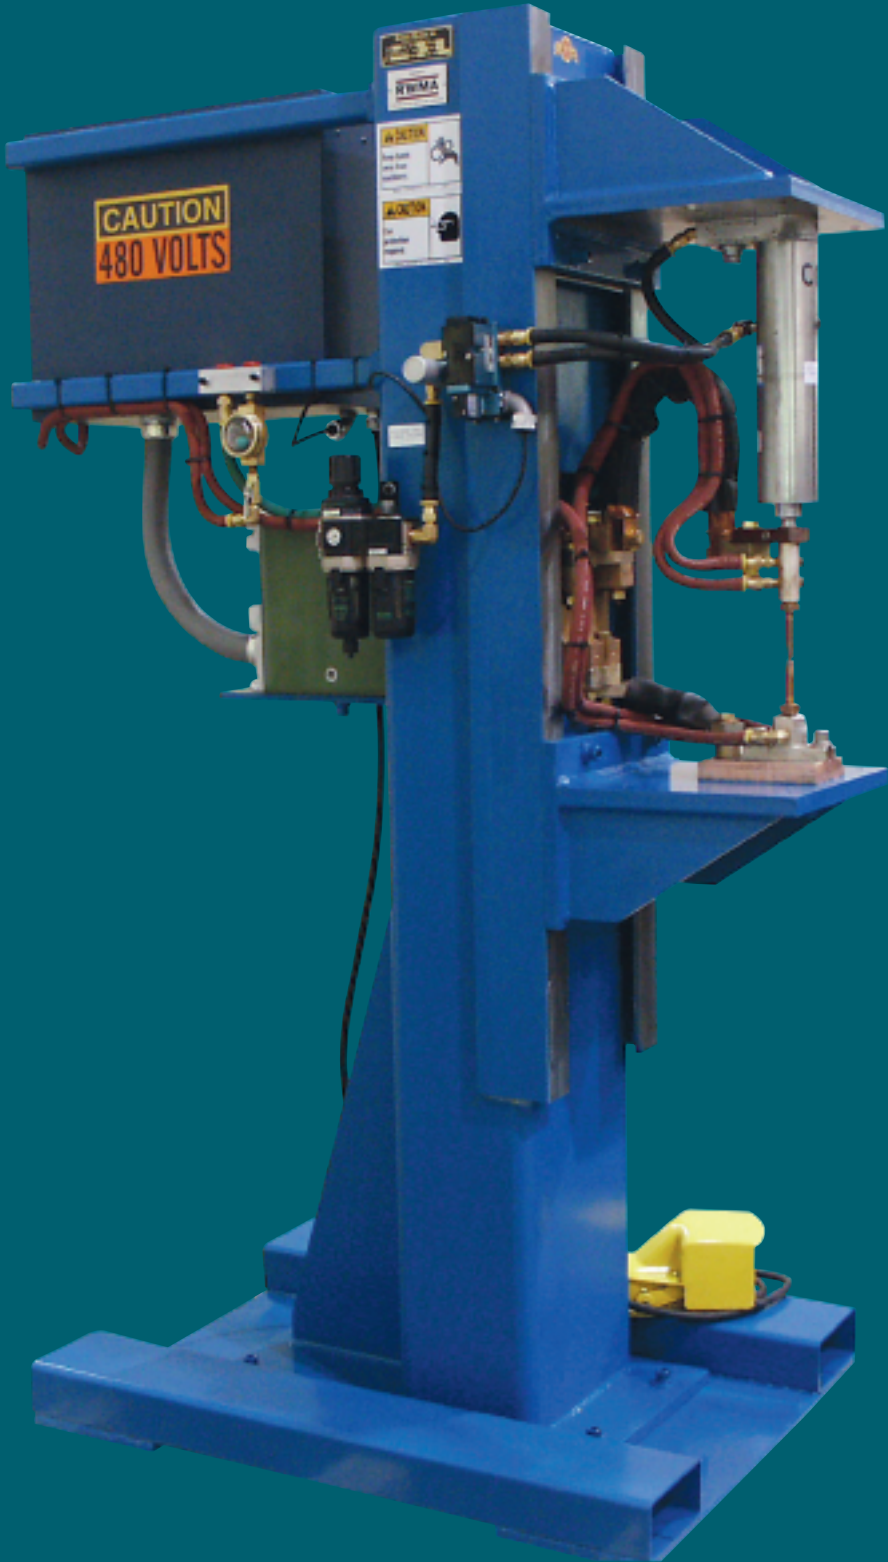


BANNER
WELDING SYSTEMS

C-FRAME WELDERS - MODEL OFG

BANNER Model OFG C-Frame Welder.

This welder is a single phase, air operated, C-frame, welder with throat depths of 10". Ideal for cells and other applications requiring minimal use of floor space, the head and knee are adjustable for added versatility. A reinforced fabricated steel frame maintains alignment of head and knee. The head features a weldment pre-drilled for single or multiple weld guns. A highly conductive copper platen provides tapped holes for installation of

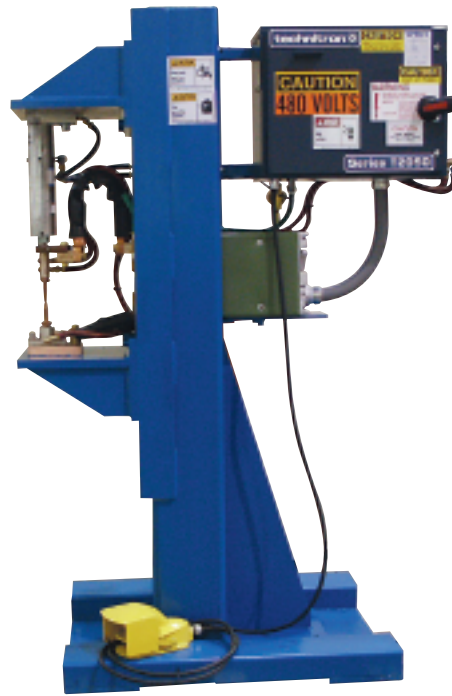

weld dies, or electrode holders. The wound core transformer features water cooled, cast copper secondaries for high production applications. Heat range selection is adjustable by a rear mounted tap switch. This unit comes complete with all necessary airline components including: solenoid valves, airline, filter, lubricator, gauge, and flow control. All mounted for easy maintenance. A sturdy, shrouded foot switch is also supplied and interconnected.

This C-Frame Welder is featured here with additional accessories.

SPECIFICATIONS - RWMA SIZE 0

Type	Throat Depth (In.)	KVA	Single or Multiple Weld Guns	Typical Weld Force at 80 PSI	Electrode Morse Taper	Overall Dimensions (In.)			Approx. Shipping Weight (Lbs.)
						"H"	"W"	"D"	
OFG-A	10	85	Weld forces and strokes vary with the size of the weld guns selected	1000	2	73	20	40	1000

Specifications listed are typical and are not guaranteed. All specifications subject to change without notice. Consult BANNER WELDER, INC. for availability of other options.

Banner Welder, Inc. • N117 W18200 Fulton Drive • P.O. Box 1008 • Germantown, WI 53022
Telephone: 262/253-2900 • FAX: 262/253-2919 • www.bannerweld.com
For product information or consultation and product application assistance, contact Banner Welder, Inc. directly.

BANNER
WELDING SYSTEMS